

# Security Gate SARL

## FLAP VARIATIONS THAT EXPAND THE USAGE SCENE


Compact body gate with selectable flap-panel solves various issues. The suitable type can be used in various situations, such as the entrance and exit of unmanned payment stores, automation of infectious disease countermeasures, and labor saving in ticketing operations.



Acrylic flap-panel

Urethane flap-panel

Flap-less-panel

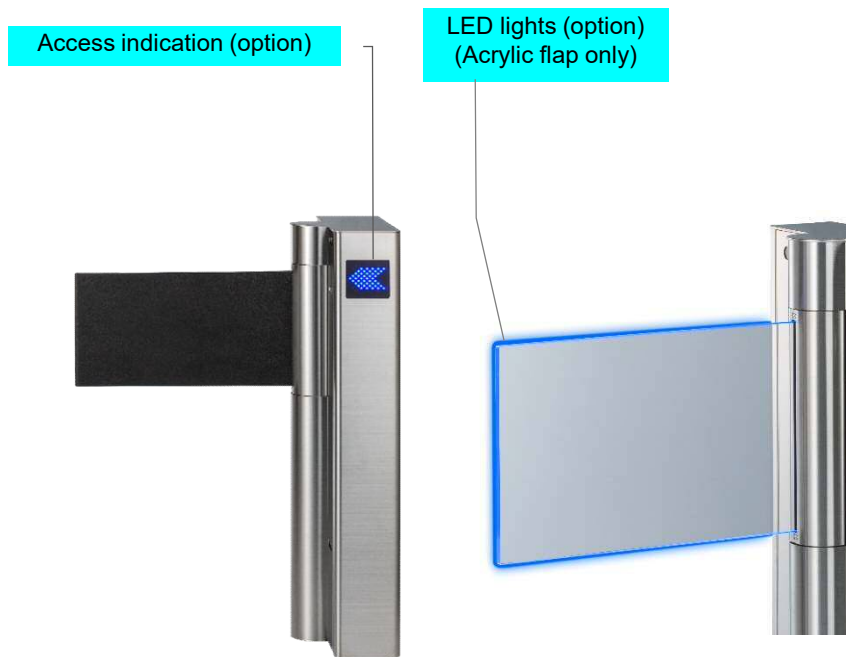

### 1. FEATURES

#### *Flap-panel type that can be selected from 3 types*

Three types: acrylic flap-panel, urethane flap-panel, and flap-less type. The acrylic flap, which does not block your view and does not give a feeling of pressure, and the urethane flap, which is a flexible material that emphasizes safety, have become compact with a height of approximately 250 mm. Slim flap-less type can increase security much simpler as a sensor gate.

#### *Compact body that combines multiplicity of use and safety*

We realize the space saving with a depth of 365 mm by narrowing down the functions, and also round the corners of the body to improve safety. The promotional sheet for advertisement can be applied to the body and installed in various places.

#### *Possibility to use in various ways*

By linking with a body temperature check/ mask detection terminal and a disinfectant dispenser, efficient infectious disease countermeasures can be implemented. It can also be used in various places because it can be linked with an unmanned payment system or ticketing system.

# Security Gate SARL




Flap-panel specifications	Acrylic flap-panel	Urethane flap-panel	Flap-panel-less
Access control system	Not included		
Direction	Both directions		
Capacity	Max 50 people/ min.		
Panel opening/ closing speed	Opening and closing speed can be set individually in 4 steps		—
Dimensions for gate body	W120 x H900 x D365 mm ( Width of central cylinder : W185m m )		W120 x H900 x D365 mm
Panel height	800m m	797.m m	—
Flap material	Acrylic (t10mm)	Urethane resin	—
Body weight	Single flap-panel specifications ( 1 chassis ) : Around 40 kg. Double flap-panels specifications ( 2 chassis ) : Around 75kg		Around 30 kg.
Aisle width	Single swing aisle : 600 mm. Double swing aisle : 900 mm.		600mm ~ 900m m
Main exterior materials	Body : Stainless steel.		
Finish	Stainless : Hairline finish		
Power supply	AC220V±10% 50/ 60Hz with grounding / AC90V-110V 50/ 60Hz with grounding		
Consuming power	Not in use : 8.2W ( 11.8VA ) In use : 46.2W ( 55.0VA ) Single flap-panel specifications Not in use : 13.2W ( 16.3VA ) In use : 87.8W ( 122.8VA ) Double flap-panels specifications		3.6W(9.2VA)
Power outage	Flap panels can be opened with your hands		
Operation temperature	0 - 40°C Humidity : No condensing		
Installation	Indoor		


# Security Gate SARL

## Acrylic flap-panel type


■ Single flap-panel specifications





■ Double flap-panels specifications

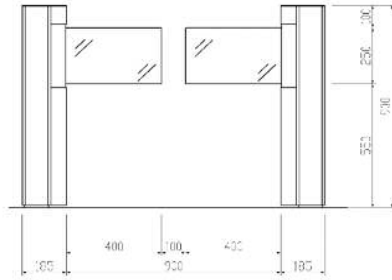

■ Side view



■ Top view

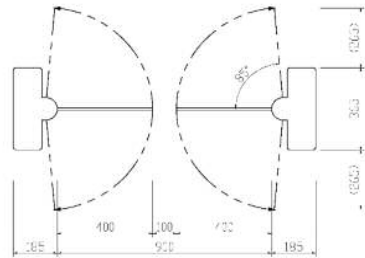

■ Front view




■ Top view




## Urethane flap-panel type


■ Single flap-panel specifications





■ Double flap-panels specifications

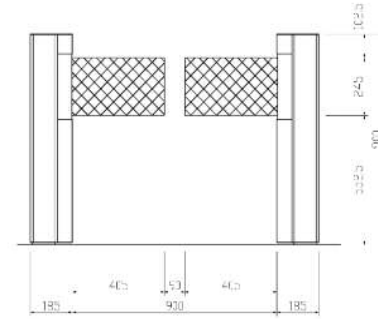


■ Side view



■ Top view



■ Side view



## Flap-panel-less type

■ Top view

